


Flexible current clamps 30/300/3000A for analysers and testers

Calmet FCT3000AC.B	
•	3 current measurement ranges: 30A, 300A, 3000A
•	Large current loop diameter
•	Simultaneously current measurement in 3 phases
•	Exchangeability of clamps between devices with keeping accuracy
•	Works with TE30 and TS33 testers and analysers

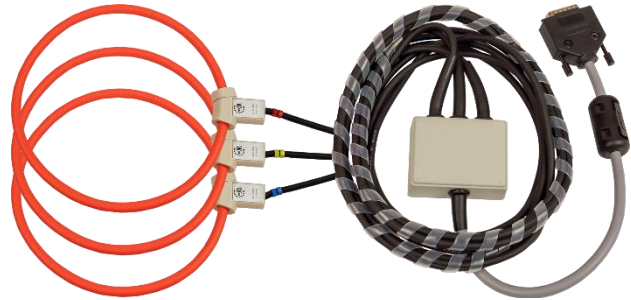

Flexible current clamps (Rogowski coils) FCT3000AC.B allow for easy current measurement on cables and bars in electric installation. Due flexibility and small sensor diameter it is easy to assembly them in hard access places. Maximum diameter of cable, on which we can close the sensor is about 150mm.

Technical specification

Parameter	Value
Range of current	0,3...30A/3...300A/30...3000A
Output voltage	100mV, 10mV, 1mV / 1A
Minimum load impedance	≥100kΩ
Accuracy	1% m.v.+ 0,1% r.v.
Frequency range	10Hz to 50kHz
Linearity (10% to 100% of range)	0.2% m.v.
Temperature coefficient	±0,08% m.v. / °C
Maximum voltage of cable / bar	600V AC RMS
Cable length	500mm
Cable sensor diameter	8mm
Bend radius	38,1mm
Length of connecting cable	2,85m
Temperature range operation / storage	-20 °C do +85 °C
Weight	approx. 0,75kg
Safety	600V RMS, Cat. III, Pollution degree 2
Safety standards	EN 61010-1, -2, -031


m.v. – measured value; r.v. – range value

Warning!



- flexible clamps can be only used by qualified personnel;
- protect flexible clamps against water and humidity;
- always connect flexible clamp to tester before installing it on cable;
- always precisely block the lock before starting measurements;
- never use flexible clamp for measurements on cables with voltage greater than 600V.

Closing the current sensor

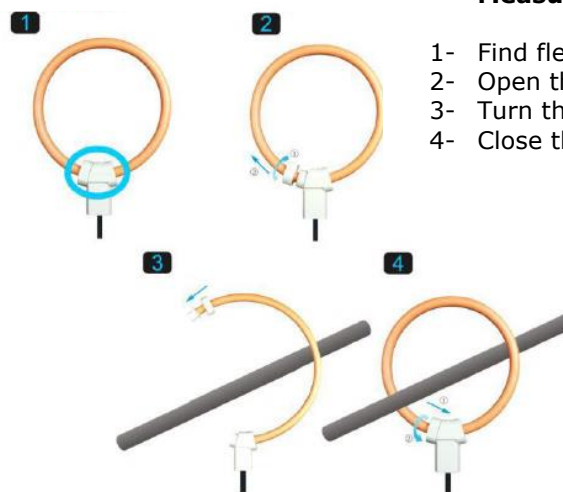

Measurement Procedure

- 1- Find flexible clamp lock
- 2- Open the Lock
- 3- Turn the sensor around cable
- 4- Close the lock precisely

Calmet sp. z o.o.
 Kukulcza 18 Street, 65-472 Zielona Gora, Poland
 Tel. +48 68 324 04 56 Fax +48 68 324 04 57
 E-mail: mail@calmet.com.pl Internet: http://www.calmet.com.pl